


## USB - Windows 98 Installation Guide

- Connect the device to a spare USB port on your PC. This will launch the Windows **"Add New Hardware Wizard"**. Windows may display a message reading **"Building driver database"** at this point which may take a few minutes to pass. Click **"Next"** to proceed with the installation.



- Select **"Search for the best driver for your device. (Recommended)."** as shown below and then click **"Next"**.

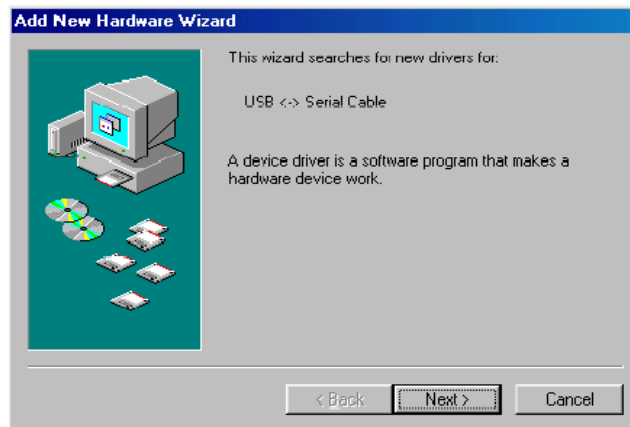

- Check the box next to **"Specify a location"** and uncheck all others as shown below. Click **"Browse"** and locate the driver files: they are in the **CD Corob Windows Software version 4.8 and subsequent**, in the directory **"Tools\USB\_Drivers"**. Once the files have been located, click **"Next"** to proceed with the installation.




- Windows may display a message reading "**Building driver database**" at this point which may take a few minutes to pass. Once Windows has found the required files, click "**Next**" to install the device.



- Windows should then display a message indicating that the installation was successful. Click "**Finish**" to complete the installation. The device is now ready for use.




- To see the new device installed, open the "**Device Manager**" tab (located in "**Control Panel**" -> "**System**") and select "**View devices by type**". The device appears as an additional COM port with the label "USB Serial Port".

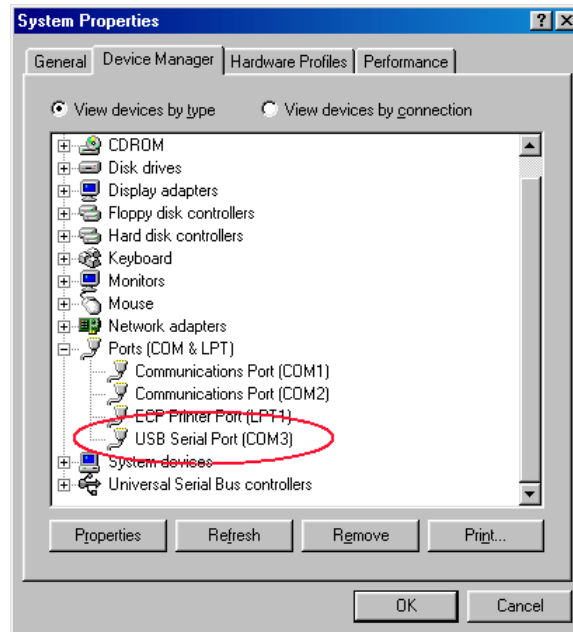


## Uninstalling VCP Drivers

To uninstall the drivers for the USB Serial Port device, follow the instructions below:

- Open the **Add/Remove Programs** utility located in "**Control Panel** -> **Add** -> **Remove Programs**". Select "**FTDI USB- Serial Converter Drivers**" from the list of installed programs.

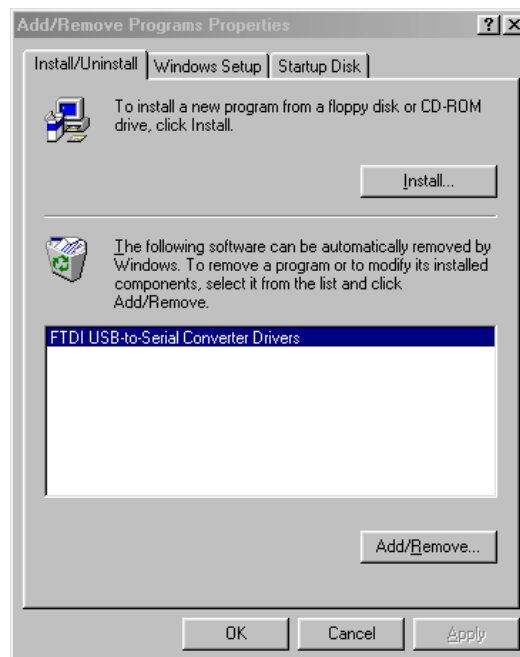

- Click the "**Add/Remove**" button. This will run the FTDI uninstaller program. Disconnect any FTDI devices that are attached to the PC. Click "**Continue**" to run the uninstaller or "**Cancel**" to exit.

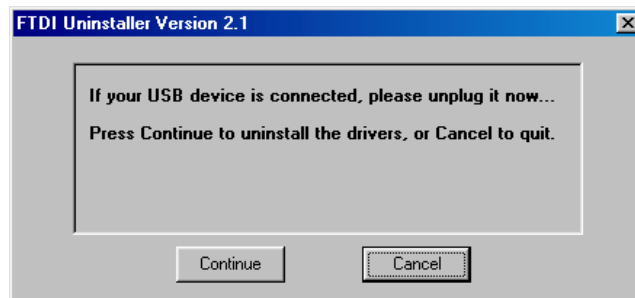

- When the uninstaller has finished removing the device from the system, the caption on the "**Cancel**" button will change to "**Finish**". Click "**Finish**" to complete the process.

