

Large tinting capacity in a space-saving footprint



The D600 automatic paint simultaneous dispenser is a well-established, trustworthy gear pump machine that combines excellent colorant capacity and dispensing speed with a narrower depth, thus representing the ideal solution if you require medium to high volume productivity in a limited space.

The COROB D600 offers a high flow rate capability and up to 6 liters per minute simultaneous dispensing, thus meeting the demands of professional stores, as well as high-volume paint distribution centers.

The unit is powered by the tested and proven COROB gear pump technology now coupled with the latest smart 5G electronics.

Ideal for decorative and industrial tinting systems, the gear pump is also available in stainless steel for optimal performance in abrasive and corrosive conditions.

The three-way valve with colorant recirculation, coupled with the advanced 5G management, guarantees consistent and precise tinting results.

The equipment features an external head frame and different options to facilitate the handling of heavy paint cans. The automatic shelf self-positions itself at the correct height for every can size, simplifying loading and unloading operations.

Other options include the semi-automatic shelf, or no shelf at all for those who prefer to use an external roll conveyor and set up an in-line workflow.

A certain degree of flexibility is provided by the modular expandability to accommodate up to 24 colorants, and by the wide range of canister sizes to choose from.



HIGH PRODUCTIVITY

Speed up service with 6-channel simultaneous dispensing and high flow rate



SMART

New 5G functionalities for optimized dispensing



RELIABLE

Tested and proven gear pump technology




ERGONOMIC

Operator-friendly functions for handling medium to large cans

ABOUT US

COROB, a GRACO company, is a global leader with a long and successful history in developing, manufacturing and delivering high-tech dispensing and mixing solutions for the widest range of tinting applications. Our offering is supported by a global service network making COROB a total solution provider.

D600

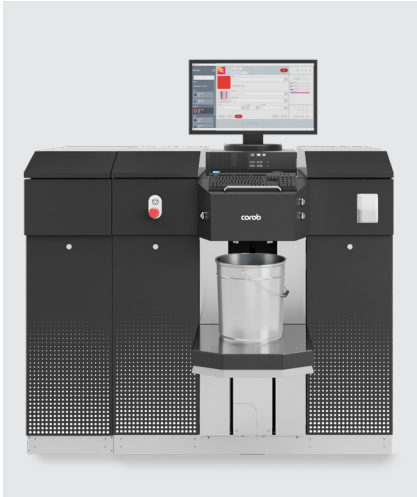

Technical data

| Business environment | DIYs / Professional paint stores |
|--|---|
| Volume output | Medium / High |
| Dispensing technology | Gear |
| Dispensing flow | Simultaneous |
| Circuit flow rate [l/min]* | STD 0.5 - HF 1.0 |
| Minimum dispensed quantity [fl.oz.] (cc)* | STD 1/768 (0.039) - HF 1/384 (0.077) |
| Valve type | COROB 3-way electric valve (with re-circulation) |
| Canister configurations | Up to 24 |
| Canister sizes [l] (q-G)** | 3 (3 q) / 4 (4 q) / 6 (6 q) / 9 (9.5 q) / 15 (4G) |
| Colorant compatibility | Water, Universal, Solvent |
| Dimensions HxLxD [mm] (in) | 1190 x 1070 x 876 w/o shelf - 1108 w/ shelf (46.9 x 42.1 x 34.5 - 43.6) |
| Footprint [sqm] (sq ft) | From 0.96 (10.3) to 1.19 (12.8) according to model configuration |

* Values highly affected by the nature of the colorants and their rheological properties.

** The bigger size canisters reduce the maximum canister number possible.